FB120D

Discover the pleasure of performance



- Max. Permitted weight 16 000 kg
- Maximum loading length 4,9 m
- Crane with a maximum reach of 9,4 m

Trailer FB120D

FTG Källefall forest trailer FB120D has a loading capacity of 12 000 kg and a permissible total weight of 16 000 kg.

FB120D is a forestry trailer with a crane range from 6.9 m to 9.4 m of reach. It is suitable for transporting timber, firewood, pulpwood and other logs.

FB12OD trailer has a double beam frame, straight drawbar with rotating towing eye Ø 50 mm, drawbar steering with 2 hydraulic cylinders, stable protective gates, hydraulic flap-down support legs with blocking valve, boogie axle, air brakes on 4 wheels with internal brake cylinders, 4 bunks with 8 stakes, welded on sling loops for tension belt, stake holders for log bundles, foldable LED rear lighting with license plate lights,

wheels 500/50-17 with traction profile and valve protection. FB120D trailer can also be equipped with a 2-wheel drive (Black Bruin, B250 hub motors) on the rear axle and its own oil supply for optimum traction.

To meet the specific needs of each user and to expand the areas of use, FB120D trailers have a wide range of options and accessories.

FB120D combined with FTG Källefall forestry crane offers high reliability and efficiency.

Suitable cranes:

- FB69T Mv78T
- <u>M69T</u> <u>Mv94T</u>
- <u>M75T</u> P82T

Technical characteristics


Trailer with standard equipment

Parameter	FB120D	Parameter	FB120D
Permitted weight*, kg	16 000	Wheels	500/50-17
Loading capacity, kg	12 000	Hydr. drawbar steering	2 cylinder
Load area, m ²	2,45	Hydr. support legs	Flap-down
Weight,*, kg	2 700	Bunks	4
Load length, m	4	Stakes	8
Frame, mm	200x100	WD system	Optional

^{*} Weights may vary depending on the equipment and brakes

▲FTG KÄLLEFALL

Technical drawings

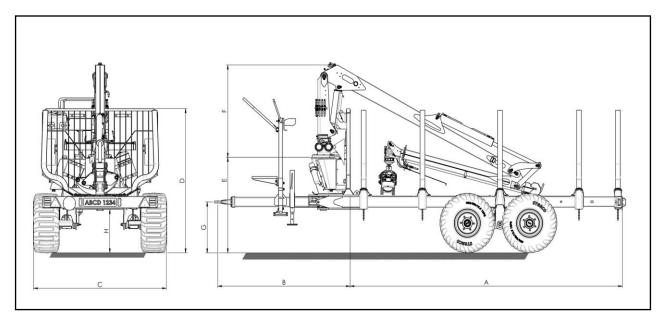

Trailer	Crane	Wheels	А	В	С	D	E	F	G	Н
	FB69T	500/50-17	4165-5060	2360-2420	2635	2455	1585	1370	745-802	700
	M69T		4165-5060	2360-2420	2635	2455	1585	1580	745-802	700
FB120D /	M75T		4165-5060	2360-2420	2635	2455	1585	1750	745-802	700
FB12OD-2WD	Mv78T		4165-5060	2360-2420	2635	2455	1585	1850	745-802	700
	Mv94T		4165-5060	2360-2420	2635	2455	1585	1850	745-802	700
	P82T		4165-5060	2360-2420	2635	2455	1585	2000	745-802	700

^{*} Dimensions may vary depending on the equipment

Brake system options

- Hydraulic brakes
- Air brakes
- Air brakes 40 km/h approved

FB120D : G=

Drawbar options

- Downwards
- Straight
- Upwards



FB120D accessories

Independent hydraulic system



Frame extension



Stake extension



Operators platform



Operators platform with ladder



Operators platform with seat



Insert plates



Plywood floor lining



Height adjustable parking leg



Fuel tank holder with tank



Wheel support



Wheels 550/45-22.5 Traction profile



Wheels 600/50-22.5 Traction profile





FTG BALTIC UAB

Dūmų st. 3 K20 LT-11119 Vilnius, Lithuania +370 5 246 23 18 sales.vilnius@ftgforest.com By combining our Swedish heritage with constant innovation based on the needs of customers, we design forest trailers and cranes that impress by their consistently pleasant performance.

FTG Källefall forest trailers can pass through challenging terrains and are robustly built to withstand tough grips in the forest. Trailers' capacity varies from 2,5 to 12 tones. Our trailers can be supplemented with telescopic cranes, ranging from 4,2 to 9,4 meters reach. Källefall cranes are strong, fast, and easy to operate. We also offer a wide range of timber grapples and other accessories to meet different needs.