FB90

Discover the pleasure of performance



Trailer FB90

FTG Källefall forest trailer FB90 has a loading capacity of 9 000 kg and a permissible total weight of 11 300 kg.

FB90 is a forestry trailer with a crane range from 5.1 m to 7.5 m of reach. It is suitable for transporting timber, firewood, pulpwood and other logs.

FB90 trailer has a single beam frame, straight drawbar with rotating towing eye Ø 50 mm, drawbar steering with 2 hydraulic cylinders, stable protective gates, hydraulic telescopic support legs, boogie axle, 3 bunks with 6 stakes, toolboxes, wheels 400/60–15.5. FB90 trailer can also be equipped with a 2-wheel drive (Black Bruin, B240 hub motors) on the rear axle and its own oil supply for

optimum traction.

To meet the specific needs of each user and to expand the areas of use, FB90 trailers have a wide range of options and accessories.

FB90 combined with FTG Källefall forestry crane offers high reliability and efficiency.

Suitable cranes:

- <u>FB51L</u> <u>FB69T</u> P75T
- <u>FB63T</u> <u>P65</u> <u>M65T</u>
- <u>FB63TS</u> <u>P67T</u> M69T

Technical characteristics


Trailer with standard equipment

Parameter	FB90	Parameter	FB90
Permitted weight*, kg	11 300	Wheels	400/60-15.5
Loading capacity, kg	9 000	Hydr. drawbar steering	2 cylinder
Load area, m ²	2	Hydr. support legs	Teleskopic
Weight,*, kg	1600	Bunks	3
Load length, m	3,7	Stakes	6
Frame, mm	160x160	WD system	Optional

^{*} Weights may vary depending on the equipment and brakes

▲FTG KÄLLEFALL

Technical drawings

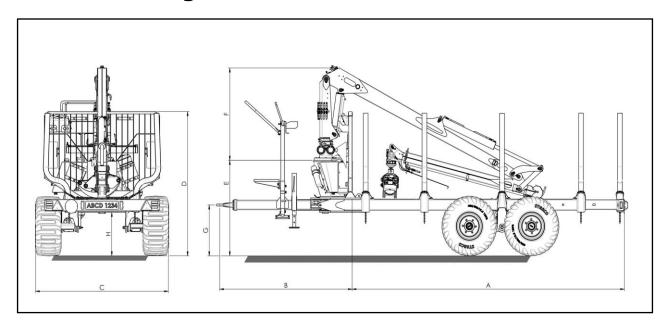

Trailer	Crane	Wheels	А	В	С	D	E	F	G	Н
	FB51L	400/60-15.5	3865-4465	2000-2620	2040	2175	1400	1490	386-959	640
	FB63T		3865-4465	2000-2620	2040	2175	1400	1370	386-959	640
	FB63TS		3865-4465	2000-2620	2040	2175	1400	1370	386-959	640
FB90 /	FB69T		3865-4465	2000-2620	2040	2175	1400	1370	386-959	640
FB90-2WD	P65		3865-4465	2000-2620	2040	2175	1400	2000	386-959	640
	P67T		3865-4465	2000-2620	2040	2175	1400	1800	386-959	640
	P75T		3865-4465	2000-2620	2040	2175	1400	2000	386-959	640
	M65T		3865-4465	2000-2620	2040	2175	1400	1540	386-959	640
	M69T		3865-4465	2000-2620	2040	2175	1400	1580	386-959	640

^{*} Dimensions may vary depending on the equipment

Brake system options

- Hydraulic brakes
- Overrun brakes
- Overrun and hydraulic brakes
- Air brakes
- Air brakes 40 km/h approved

Drawbar options

- Downwards
- Straight
- Upwards

FB90 accessories

Independent Toolbox cover Center beam hydraulic system protection Block valve for Operators Operators telescopic platform with platform with support legs seat Parking leg Height adjustable Parking wheel parking leg Protective plates Fuel tank holder Wheel support for support legs with tank set Stake holder for 1 Frame extension Registration plate meter wood plate light protection bar Stake connection Stake extension Insert plates Wheels 400/60-Wheels 480/45-17 Wheels 500/50-

Traction profile



FTG BALTIC UAB

15.5 Traction

profile

Dūmų st. 3 K20 LT-11119 Vilnius, Lithuania +370 5 246 23 18 sales.vilnius@ftgforest.com By combining our Swedish heritage with constant innovation based on the needs of customers, we design forest trailers and cranes that impress by their consistently pleasant performance.

17 Traction profile

FTG Källefall forest trailers can pass through challenging terrains and are robustly built to withstand tough grips in the forest. Trailers' capacity varies from 2,5 to 12 tones. Our trailers can be supplemented with telescopic cranes, ranging from 4,2 to 9,4 meters reach. Källefall cranes are strong, fast, and easy to operate. We also offer a wide range of timber grapples and other accessories to meet different needs.