

FB70

Discover the pleasure of performance



- Max. Permitted weight 9 000 kg
- Maximum loading length 4,4 m
- Crane with a maximum reach of 6,9 m

Trailer FB70

FTG Källefäll forestry trailer FB70 has a loading capacity of 7 000 kg and a permissible total weight of 9 000 kg.

FB70 is a compact forestry trailer with a crane range from 5,1 m to 6.9 m of reach. It is suitable for transporting firewood, pulpwood, and other logs.

FB70 trailer has a single beam frame, bogie axle, stable protective gates, drawbar with hydraulic steering, telescopic A-type supports legs, eyelets for tension belt, 2 pairs of bunks with 4 stakes and tires 11.5/80-15.3 with grooved profile and valve protection.

Trailer FB70 can also be equipped with a 2-wheel drive (Black Bruin, B240 hub motors) on the rear axle and its own oil supply for optimum traction.

FB70 trailers offer a wide range of options and accessories to meet the specific needs of each user and expand their areas of use.

FB70 combined with FTG Källefäll forestry crane offers high reliability and efficiency.

Suitable cranes:

- [FB51L](#) - [FB63TS](#) - [P57](#)
- [FB53T](#) - [FB69T](#) - [P67T](#)
- [FB63T](#) - [P52](#) - [M65T](#)


Technical characteristics

Trailer with standard equipment

Parameter	FB70	Parameter	FB70
Permitted weight*, kg	9 000	Wheels	11.5/80-15.3
Loading capacity, kg	7 000	Hydr. drawbar steering	1 cylinder
Load area, m ²	1,9	Hydr. support legs	Telescopic
Weight,*, kg	1 300	Bunks	2
Load length, m	3,8	Stakes	4
Frame, mm	140x140	WD system	Optional

* Weights may vary depending on the equipment and brakes

Technical drawings

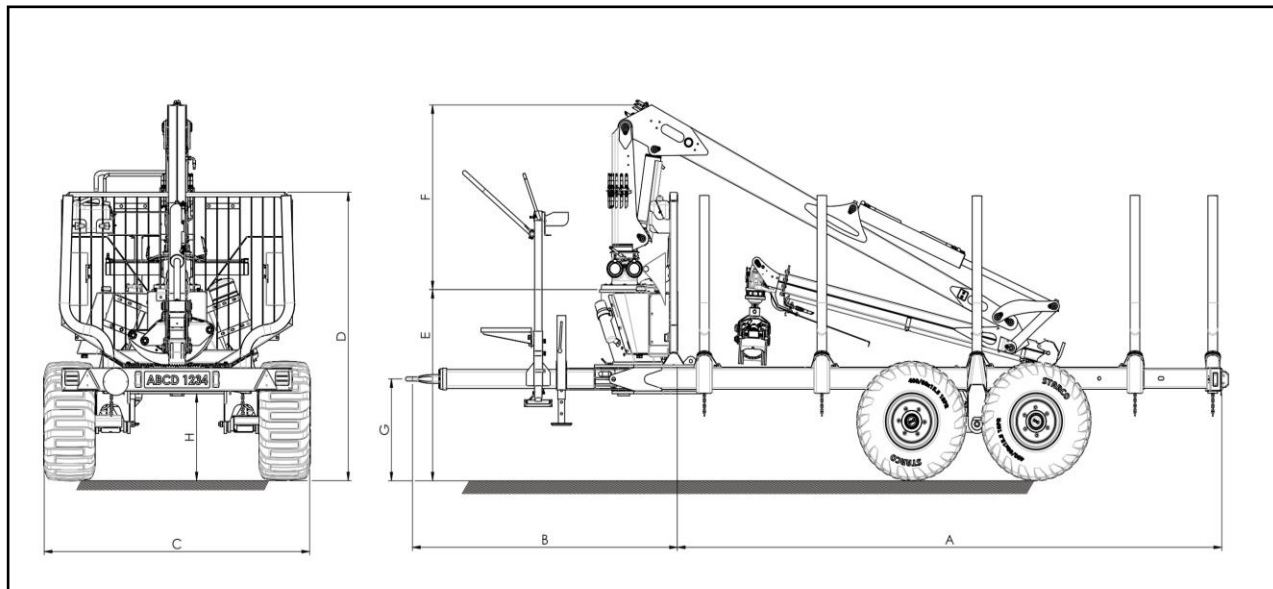

Trailer	Crane	Wheels	A	B	C	D	E	F	G	H
FB70	FB51L	400/60-15.5	3865-4165	1845-2475	2035	1950	1365	1350	407-864	625
	FB53T		3865-4165	1845-2475	2035	1950	1365	1330	407-864	625
	FB63T(S)		3865-4165	1845-2475	2035	1950	1365	1360	407-864	625
	FB69T		3865-4165	1845-2475	2035	1950	1365	1450	407-864	625
	M65T		3865-4165	1845-2475	2035	1950	1365	1800	407-864	625
	P52		3865-4165	1845-2475	2035	1950	1365	1600	407-864	625
	P57		3865-4165	1845-2475	2035	1950	1365	1800	407-864	625
	P67T		3865-4165	1845-2475	2035	1950	1365	1800	407-864	625

* Dimensions may vary depending on the equipment

Brake system options




















- Hydraulic
- Overrun
- Overrun with hydraulic
- Air brakes

Drawbar options

- Straight
- Upwards
- Downwards



FB70 accessories

Independent hydraulic system		Toolbox with cover		Center beam protection	
Block valve for telescopic support legs		Operators platform with ladder		Operators platform with seat	
Parking leg		Parking wheel		Height adjustable parking leg	
Protective plates for support legs		Fuel tank holder with tank		Wheel support set	
Bunk with stakes		Frame extension		Insert plates	
Stake extension		Stake connection		Wheels 400/60-15.5 Traction profile	
Wheels 400/60-15.5 Road profile					



FTG BALTIC UAB

Dūmų st. 3 K20
LT-11119 Vilnius, Lithuania
+370 5 246 23 18
sales.vilnius@ftgforest.com

For more information: www.ftgkallefall.com

By combining our Swedish heritage with constant innovation based on the needs of customers, we design forest trailers and cranes that impress by their consistently pleasant performance.

FTG Källefäll forest trailers can pass through challenging terrains and are robustly built to withstand tough grips in the forest. Trailers' capacity varies from 3 to 12 tones. Our trailers can be supplemented with telescopic cranes, ranging from 4,2 to 9,4 meters reach. Källefäll cranes are strong, fast, and easy to operate. We also offer a wide range of timber grapples and other accessories to meet different needs.