FB90D

Discover the pleasure of performance



Trailer FB90D

FTG Källefall forestry trailer FB90D has a loading capacity of 9 000 kg and a permissible total weight of 11 300 kg.

FB90D is a forestry trailer with a crane range from 5,1 m to 7.5 m of reach. It is suitable for transporting timber, firewood, pulpwood and other logs.

FB90D trailer has a double beam frame, straight drawbar with rotating towing eye \emptyset 50 mm, drawbar steering, stable protective gates, hydraulic telescopic support legs, boogie axle, toolbox with cover, sling loops for tension belt, 4 bunks with 8 stakes, wheels 400/60–15.5.

FB90D trailer can also be equipped with a 2-wheel drive (Black Bruin, B240 hub motors) on the rear axle and its own oil supply for optimum traction.

To meet the specific needs of each user and to expand the areas of use, FB90D trailers have a wide range of options and accessories.

FB90D combined with FTG Källefall forestry crane offers high reliability and efficiency.

Suitable cranes:

- FB51L FB69T <u>M65T</u> <u>P67</u>
- <u>FB63T</u> <u>FB73T</u> <u>M69T</u> <u>P75</u>
- <u>FB63TS</u> <u>P65</u>

Technical characteristics


Trailer with standard equipment

Parameter	FB90D	Parameter	FB90D
Permitted weight*, kg	11 300	Wheels	400/60-15.5
Loading capacity, kg	9 000	Hydr. drawbar steering	2 cylinders
Load area, m ²	2	Hydr. support legs	Teleskopic
Weight,*, kg	1600	Bunks	4
Load length, m	3,8	Stakes	8
Frame, mm	160x80	WD system	Optional

^{*} Weights may vary depending on the equipment and brakes

▲FTG KÄLLEFALL

Technical drawings

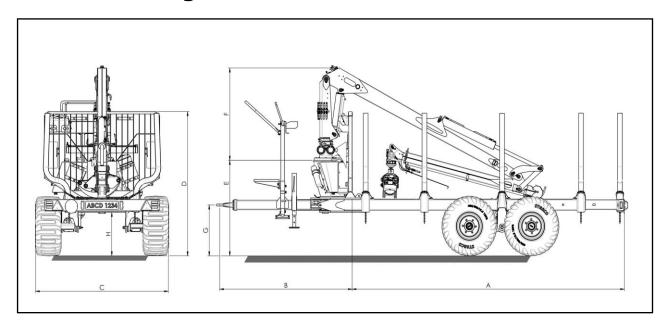

Trailer	Crane	Wheels	А	В	С	D	E	F	G	Н
F	FB51L	500/50-17	3865-4465	2000-2620	2330	2150	1435	1390	386-959	640
	FB63T(S)		3865-4465	2000-2620	2330	2150	1435	1360	386-959	640
	FB69T		3865-4465	2000-2620	2330	2150	1435	1450	386-959	640
FB90D /	FB73T		3865-4465	2000-2620	2330	2150	1435	1700	386-959	640
P65	M65T		3865-4465	2000-2620	2330	2150	1435	1600	386-959	640
	M69T		3865-4465	2000-2620	2330	2150	1435	1650	386-959	640
	P65		3865-4465	2000-2620	2330	2150	1435	2000	386-959	640
	P67T		3865-4465	2000-2620	2330	2150	1435	1800	386-959	640
	P75T		3865-4465	2000-2620	2330	2150	1435	2000	386-959	640

^{*} Dimensions may vary depending on the equipment

Brake system options

- Hydraulic brakes
- Overrun brakes
- Overrun and hydraulic brakes
- Air brakes

Drawbar options

- Downwards
- Straight
- Upwards

FB90D accessories

Independent hydraulic system



Toolbox with cover



Flap-Down type support legs, hydraulic tank integrated, CAT. II



Block valve for telescopic support legs



Operators platform with ladder



Operators platform with seat



Parking leg



Parking wheel



Height adjustable parking leg



Protective plates for support legs



Fuel tank holder with tank



Wheel support set



Plywood floor lining



Frame extension



Registration plate light protection bar



Insert plates



Stake connection



Stake extension



Wheels 400/60-15.5 Traction profile



Wheels 480/45-17 Traction profile



Wheels 500/50-17 Traction profile





FTG BALTIC UAB

Dūmų st. 3 K20 LT-11119 Vilnius, Lithuania +370 5 246 23 18 sales.vilnius@ftgforest.com By combining our Swedish heritage with constant innovation based on the needs of customers, we design forest trailers and cranes that impress by their consistently pleasant performance.

FTG Källefall forest trailers can pass through challenging terrains and are robustly built to withstand tough grips in the forest. Trailers' capacity varies from 3 to 12 tones. Our trailers can be supplemented with telescopic cranes, ranging from 4,2 to 9,4 meters reach. Källefall cranes are strong, fast, and easy to operate. We also offer a wide range of timber grapples and other accessories to meet different needs.

For more information:: www.ftgkallefall.com